

New Product Release

5 Watt IP67 UHF Pro CB Handheld Radio – TX6600PRO



PROFESSIONAL



1st February 2021

Introducing the all-new Australian Made 5 Watt UHF Pro CB Handheld Radio from GME, the TX6600PRO. With a rugged IP67 ingress-protection rating ensuring exceptional performance and years of reliable use in the harshest working environments the TX6600PRO is built tough, setting a new benchmark for professional-grade UHF CB Handheld Radios.

We have designed the TX6600PRO to suit a wide range of demanding commercial applications from construction to mining, civil projects, councils and utilities, and countless other industries that require private, dependable communication to get the job done safely and efficiently.

Key features of the TX6600PRO include 5/ 1/ 0.1 Watt switchable transmission power, 119 dealer-programmable private channels, IP67 Ingress Protection, alpha-numeric display, rotary channel selection with voice announcement, multiple power saving modes, two priority channels, and triple watch.

Designed, engineered and manufactured in Australia, the class-leading TX6600PRO is backed with a 5-year warranty.

For more information, visit www.gmeprofessional.com.au

Standard Communications Pty Ltd trading as GME. ABN: 93 000 346 814 ACN: 000 346 814

gme.net.au T: (02) 8867 6000 | F: (02) 8867 6199 | Sales: 1300 463 463 | Email: enquiries@gme.net.au
Head Office: 17 Gibbon Road, Winston Hills, NSW 2153, Australia | PO Box 96, Winston Hills, NSW 2153, Australia

New Product Release

5 Watt IP67 UHF Pro CB Handheld Radio – TX6600PRO



PROFESSIONAL


Key Specs

- 5/ 1/ 0.1 Watt switchable transmission power
- 119 Dealer-programmable Private channels
- Rugged design, IP67 ingress protection
- MIL-STD 810G
- Alpha-numeric Display
- Rotary channel selection with voice announcement
- Multiple power saving modes
- Two priority channels
- Triple watch



In the box

- 5 Watt UHF Pro CB Handheld Radio (TX6600PRO)
- 2600mAh Li-Ion Battery Pack (BP028)
- UHF Antenna 450-490MHz (AE4028)
- Desktop Charger (BCD022)
- AC Adaptor (PS005)
- Belt Clip (MB058)



Optional Accessories



HS016
Earpiece
Microphone



MC012
IP67 Speaker
Microphone



BCV012
12V DC Vehicle
Charging Cradle



BCD023
Dual Desktop
Charger



LC009
Leather Carry
Case

Standard Communications Pty Ltd trading as GME. ABN: 93 000 346 814 ACN: 000 346 814

gme.net.au T: (02) 8867 6000 | F: (02) 8867 6199 | Sales: 1300 463 463 | Email: enquiries@gme.net.au
Head Office: 17 Gibbon Road, Winston Hills, NSW 2153, Australia | PO Box 96, Winston Hills, NSW 2153, Australia

New Product Release




PROFESSIONAL

5 Watt IP67 UHF Pro CB Handheld Radio – TX6600PRO

Product Details

Model Code	TX6600PRO
Description	5 Watt IP67 UHF Pro CB Handheld Radio
EAN	93 19493 30858 8
SRP	\$479.00
Available From	1 st February 2021
Package Dimensions	69 x 285 x 110mm (700g)

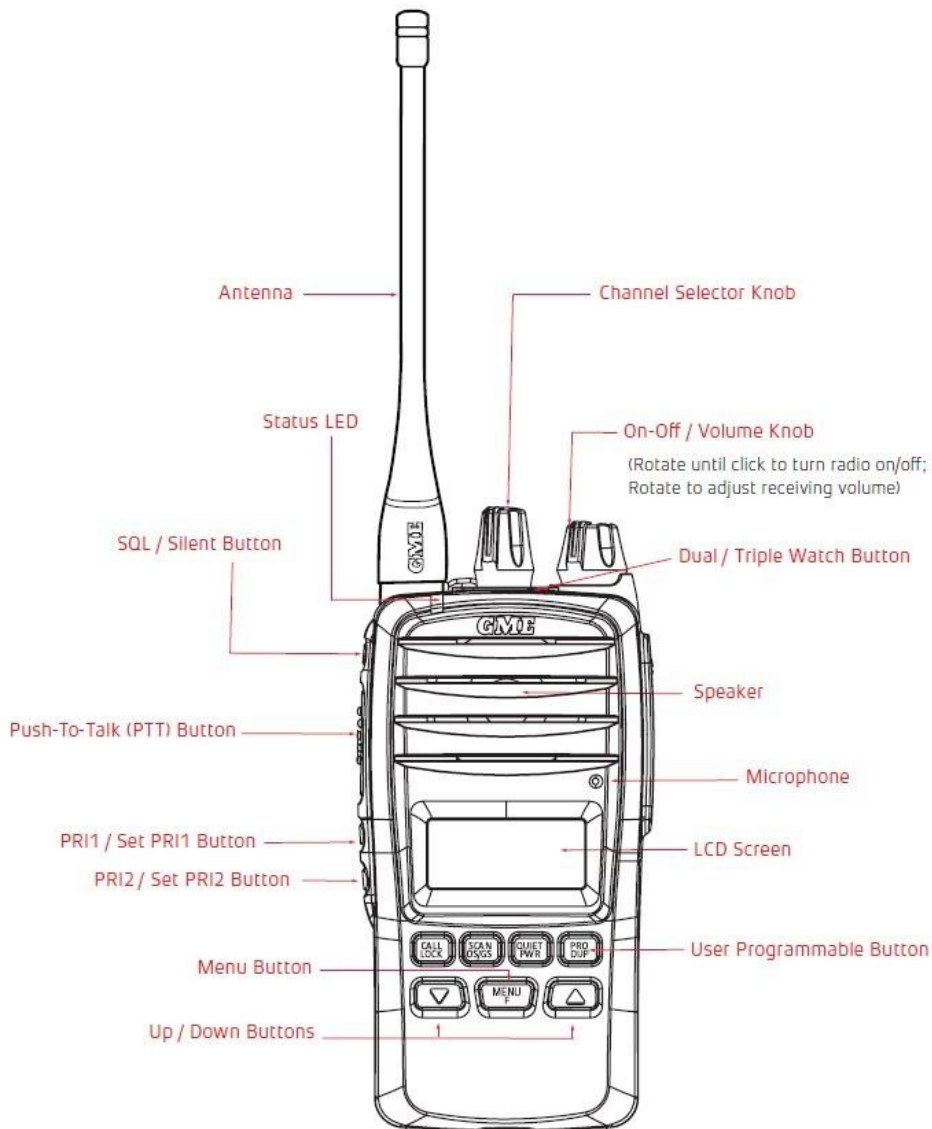

Standard Communications Pty Ltd trading as GME. ABN: 93 000 346 814 ACN: 000 346 814

gme.net.au T: (02) 8867 6000 | F: (02) 8867 6199 | Sales: 1300 463 463 | Email: enquiries@gme.net.au
 Head Office: 17 Gibbon Road, Winston Hills, NSW 2153, Australia | PO Box 96, Winston Hills, NSW 2153, Australia

New Product Release



PROFESSIONAL

5 Watt IP67 UHF Pro CB Handheld Radio – TX6600PRO

Technical Specifications

GENERAL	
Compliance:	Compliant with AS/NZS 4365 for radio communications equipment in the UHF citizen band and personal radio service, AS/NZS 4295
Frequency Range:	TX: 476.425 MHz – 477.4125 MHz (UHF CB)
	TX: 450 MHz - 520 MHz (Professional)
	RX: 403 MHz – 520 MHz
Number of Channels:	199 (80 CB plus 119 Programmable)
Channel Spacing:	12.5 kHz / 25 kHz
Scanning Speed:	45 channels per second (22 ms per channel)
Antenna:	50Ω, SMA male
Supply Voltage:	7.4 V DC
Battery Type:	Li-Ion
Battery Capacity:	2600 mAh
Operating Time:	18 h / 21 h / 22 h (5 W, power saving OFF / LO / HI)
	24 h / 33 h / 34 h (1 W, power saving OFF / LO / HI)
	30 h / 49 h / 52 h (100 mW, power saving OFF / LO / HI)
TRANSMITTER	
RF Output:	High: 5 W
	Low: 1 W
	Ultra-Low: 100 mW
Frequency Stability:	± 2.5 PPM
Modulation:	FM
Spurious Emission:	< -34 dBm
Maximum Deviation:	± 2.5 kHz
Audio Harmonic Distortion:	0.4% @ 1kHz / 1.5kHz Deviation
RECEIVER	
Sensitivity:	-121 dBm for 12 dB SINAD
	-120 dBm (450 MHz – 520 MHz)
Adjacent Channel Selectivity:	> 60 dB (NB)
	> 70 dB (WB)
Audio Output Power:	1.5 W (8Ω)
Audio Signal to Noise:	34 dB (SINAD)

MECHANICAL AND ENVIRONMENTAL	
Dimensions:	59 mm (W) x 42 mm (D) x 128 mm (H) (not including antenna)
Weight:	337 grams (with battery and antenna)
Operating Temperature:	-20° C to +60° C
Ingress Protection:	IP67 (dust tight and waterproof)
Accessory Connector:	GME 3.5 mm / 2.5 mm stereo jack

MIL-STD 810G		
Standard	Method	Procedure
High Temperature	501.5	i, ii
Low Temperature	502.5	i, ii
Temperature Shock	503.5	i
Rain Blowing/Drip	506.5	i, iii
Humidity	507.5	
Salt Fog	509.5	
Dust Blowing	510.5	i
Immersion	512.5	i
Vibration	514.6	i
Shock	516.6	i, iv

PACKAGING SPECIFICATIONS	
Dimensions	90 (D) x 280 (H) x 110mm (W)
Weight	720 grams
EAN13	93 19493 30858 8

NOTE: All values are typical unless otherwise stated and are subject to change without notice or obligation.

ACCESSORIES	
BCD022	Single Desktop Charger
BCD023	Dual Desktop Charger
BCV012	Car Kit Charger
BCM002	Six Bay Multicharger
PS005	Power Supply to Suit BCD022 and BCD023
MC012	IP67 Speaker Microphone
HS016	Ear Piece Microphone
LC009	Heavy Duty Leather Case
CC28	Nylon Case
AE4028	UHF Low Band Antenna (450-490MHz)
BP028	2600 mAh Battery Pack
MB058	Belt Clip

Standard Communications Pty Ltd trading as GME. ABN: 93 000 346 814 ACN: 000 346 814

gme.net.au T: (02) 8867 6000 | F: (02) 8867 6199 | Sales: 1300 463 463 | Email: enquiries@gme.net.au
Head Office: 17 Gibbon Road, Winston Hills, NSW 2153, Australia | PO Box 96, Winston Hills, NSW 2153, Australia